

A novel low-cost system for *Xylella fastidiosa* early detection using electrical conductivity probes

Nikolaos Marios Polymenakos¹, Ioannis Vlachos¹, Ioannis Karydis¹, and Markos Avlonitis¹

¹ Ionian University, Plateia Tsirigoti 7, Corfu, 49132, Greece

Abstract

Xylella fastidiosa is a devastating pathogen that has significantly impacted olive cultivation, particularly in Southern Italy since 2013. Monitoring and early identification is crucial for managing the spread of this disease and minimising associated economic losses. This study presents a low-cost system employing electrical conductivity (EC) probes to monitor the water status of olive tree stems, enabling the early detection of *X. fastidiosa*. The system provides real-time data by detecting changes in EC, which are possibly correlated with the presence of the pathogen. In contrast to traditional detection methods like PCR, which are expensive and require laboratory facilities, this system offers a practical, field-deployable, and sustainable solution. In a testbed EC probes were installed on an olive tree in Southern Italy, with data transmitted via a GSM network to a central server for analysis. Powered by solar energy, the system successfully detected changes in the stem's water content, which were subsequently confirmed to be associated with pathogen presence. This low-cost EC probe system initially demonstrates promising potential for the early detection of *X. fastidiosa*, enabling proactive management strategies. Future research will focus on improving the system's sensitivity and conducting extensive field trials across diverse environments and applications.

Keywords

Xylella fastidiosa, low-cost sensors, early warning, signal analysis

1 Introduction

The bacterial pathogen *X. fastidiosa* has been recognised as a significant phytopathogenic agent, causing widespread devastation across diverse plant species globally. The early detection of this pathogen is pivotal for the implementation of control measures to mitigate its spread and to minimize economic losses. However, the existing diagnostic methods are either too intricate and expensive for routine surveillance or lack the necessary sensitivity for early-stage detection. To address these challenges, this study presents the development of a low-cost, accessible system based on EC probes for the early detection of *X. fastidiosa*. The system exploits the disruption of xylem fluid conductivity caused by bacterial infection, providing a quantifiable measure that correlates with the presence of the pathogen. The proposed system is grounded in the key symptom of rapid desiccation in olive trees, as previously highlighted by Saponari et al. in their work on Olive Quick Decline Syndrome [1]. The simplicity of the approach allows for rapid, in-field diagnostics without the need for specialised laboratory equipment or expertise. By integrating the principles of electrical engineering with plant pathology, this system offers a promising solution for early-stage detection of *X. fastidiosa*, aiming to significantly reduce the time and resource burden associated with current testing methods. The paper will detail the design and development process, calibration, and field testing of the EC probes, demonstrating their effectiveness in early pathogen detection and their potential role in precision agriculture and plant disease management.



1.1 Motivation and Contribution

Considering the importance of olive cultivation for Mediterranean countries [2], there is a necessity to establish comprehensive infrastructures devoted to monitoring, researching, and managing *X. fastidiosa*. This proactive approach is vital for protecting the vast olive groves that make significant contributions to both local and national economies. Building such infrastructures could set a precedent for agricultural preparedness, ensuring readiness and effective response if the pathogen were to spread into Greek territories. Preserving these crops is not only essential from an economic standpoint but also crucial for maintaining a cultural heritage that has thrived in Greece and all Mediterranean countries for millennia [2], [3], [4]. Immediate and decisive action must be taken to preserve the tradition of olive cultivation for future generations.

The primary goal was to create a low-cost monitoring system capable of tracking the stem water of olive trees by installing probes in various branches establishing very dense networks for areas under pressure. As previously stated, a key symptom of *X. fastidiosa* is OQDS, which leads to rapid drying of the tree. Monitoring stem water serves as a critical indicator of the tree's health, making it an essential measurement. Consequently, the proposed low-cost system has been designed for every cultivator to assess fluid levels within their trees' trunks or branches almost in real time. The primary contribution of this paper can be summarized as follows:

- Proof of concept of the low-cost, and early warning system for OQDS
- Development and pilot installation in the olive grove
- Almost real-time data collection via GSM network
- An innovative solution for cultivators

2 Background – Related Work

X. fastidiosa was initially documented in the Americas in 1982 by Newton Pierce, leading to significant issues for vineyards in California at that time [5]. As **Figure 1** illustrates, the recently updated global map indicates the infection is primarily found in North and South America, with references to Europe being notably significant [6]. Since its emergence in South Italy in October 2013 [7], scientists from various fields have been diligently studying the pathogen to gain a comprehensive understanding.

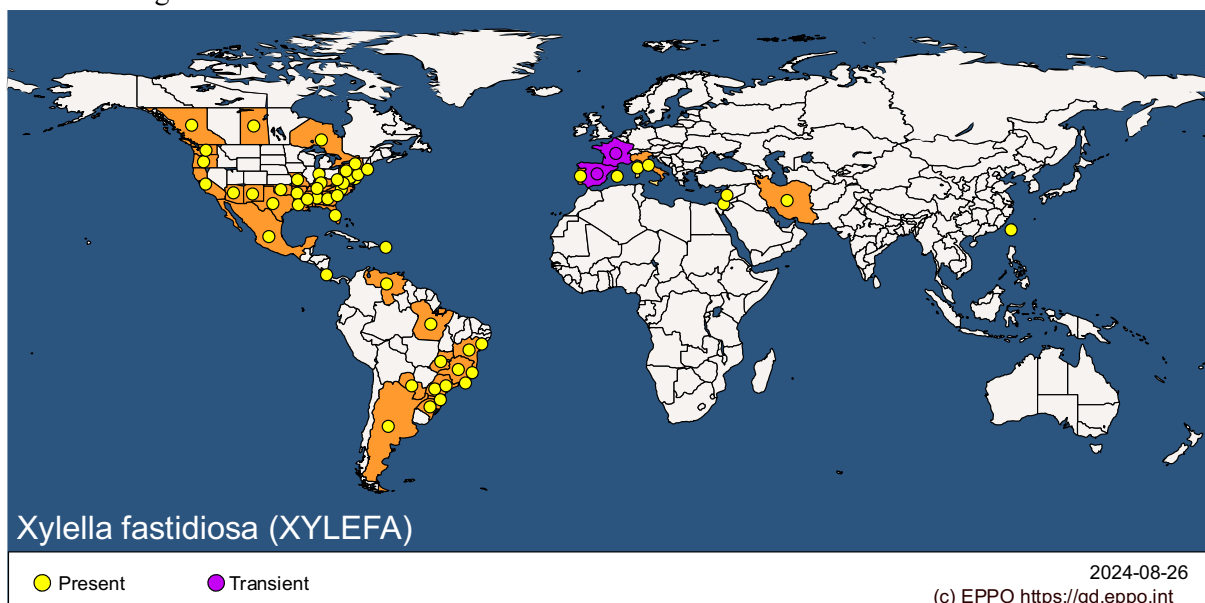


Figure 1: The global distribution of *Xylella fastidiosa* according to the EPPO database

One of the most significant symptoms of the *X. fastidiosa*, is the pathological condition Olive Quick Decline Syndrome (OQDS), which causes quick olive tree drought [1]. Thus, the stem water monitoring

is a crucial indicator about tree's health and in advance *X. fastidiosa*, and the main idea of the proposed low-cost system in this work, aims to measure almost real-time this symptom. Matheny et. al, calibrated and installed capacitance soil moisture sensors in order to monitor the stem's water levels [8]. In the same way, Saito et. al, in 2016 used soil moisture sensors to calculate the stem water content in arid environments [9]. Therefore, the technological improvement provides in-situ monitoring of stem water content, even with non-invasive methods as Cheng's et. al innovation [10]. Two different past works used a different perspective for early detection of *X. fastidiosa*, combining UAV multispectral imagery, machine learning techniques, and GIS environment [11], [12]. Morelli et. al, emphasize that additional work is still required to deliver a thorough and lasting solution, notwithstanding the efforts of various projects [13].

3 Proposed Methodology (or Materials and Methods)

The concept underlying the low-cost system design and development is grounded to the correlation between electrical resistance (ER) and hydration levels within tree stem tissues (stem water) [14], which has also an inverse relationship with electrical conductivity (EC) [15].

$$\sigma = \frac{1}{\rho}$$

3.1 System description

The aforementioned low-cost system, utilised various electronic materials, in order to measure and compare the stem water percentage in two distinct branches of an olive tree. During design and development of the system these exact components are used: (1) Raspberry Pi Model 3 B+ with Raspberry Pi OS installed, (2) INA3221 board, (3) Real Time Clock board, (4) DC-DC Buck Converter Step Down LM2596, (5) Relay, (6) USB modem, (7) Battery pack, (8) Solar panel.

The system was programmed to record one measurement every half an hour. After this procedure, the data are saved in a .csv file locally on the microcomputer, with timestamps to indicate the precise time of each reading. Finally, the system transmitted the data files compressed in a .zip file format, to the Ionian University's CMOD Lab server for backup storage, on a daily schedule via GSM internet connection.

For the measurements, percentage was used as an indicator of stem water content. The percentage range corresponds to a range of EC and is inversely proportional to the ER. The measurement is calibrated such that 100% represents the pins being submerged in water, while 0% corresponds to the pins being exposed to air or connected to an insulator. The various electronic components of the proposed low-cost system are presented in the next **Figure 2**.

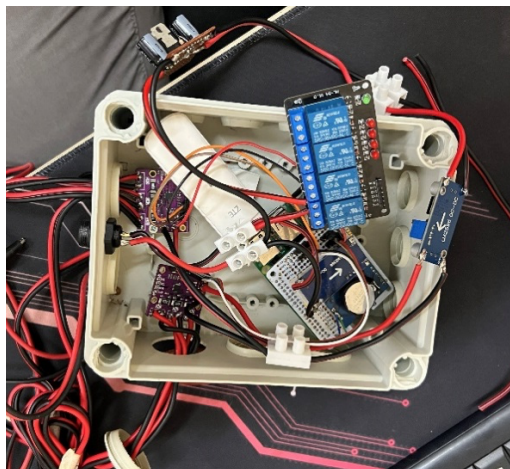


Figure 2: The low-cost system utilised in the laboratory setting during the assembly of the various electronic components

3.2 Field testing

For the in-situ investigation, a large olive tree in a widely cultivated orchard was selected, situated near the town of Ostuni, Italy. In this location, multiple olive trees had previously been uprooted by agronomists due to recent *X. fastidiosa* infestations. The cultivator and landowner of this orchard informed the researchers that this specific tree was also diagnosed with *X. fastidiosa*. As expected, the tree utilised for the experimentation was also uprooted by the agronomists in March of 2024.

To install the system, two small holes as shown in the **Figure 3** were drilled per sensor at different branches to enable comparative assessment of the variability in stem water content across the branches.



Figure 3. The electrical conductivity probes as were installed in the tree on-site.

4 Results

The comparative analysis of stem water content in two olive tree branches spanned from July to November 2023, as depicted in **Figure 4**. This figure illustrates the percentage changes in stem water content over time for both Branch 1 (B1) represented in red, and Branch 2 (B2) represented in blue, with the data smoothed using a moving average to enhance the visualization of the trends.

In July, the two branches exhibited relatively similar stem water content levels, with B1 having an average water content of 17.7% and B2 recording slightly higher levels at 17.8%, resulting in a 0.17% difference.

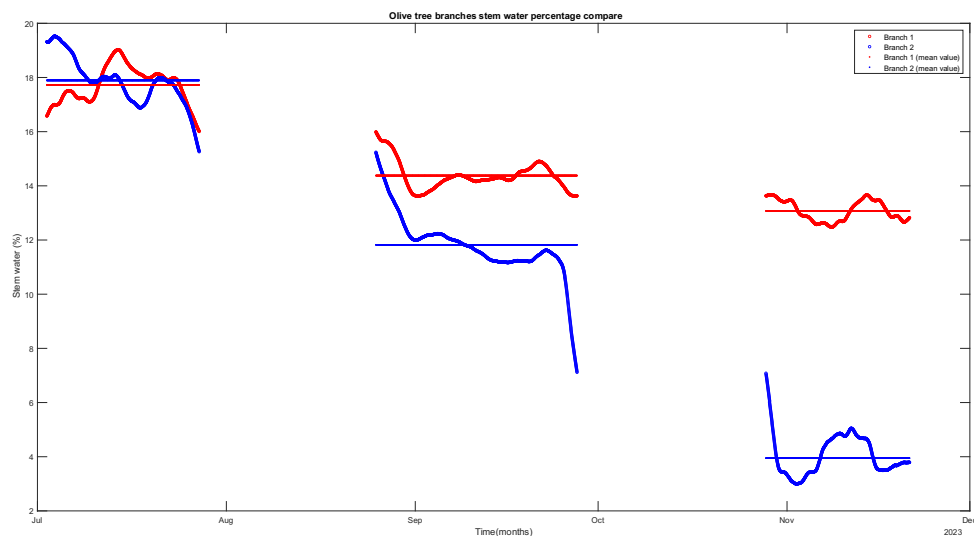


Figure 4. A comparative analysis, using MATLAB² of stem water content levels as percentage across olive tree branches during the July to November 2023 period.

² The MathWorks, Inc. (2023). MATLAB R2023a. Natick, Massachusetts, United States.

During the latter part of August and throughout September, a noticeable divergence emerged. B1's stem water content steadily decreased, reaching an average of 14.3% by the end of September. Furthermore, B2 exhibited a more significant decline, with levels reaching 11.8%, resulting in a 2.5% difference between the two branches.

This trend continued through November. By the end of the study in November, B1's showed a small decrease of stem water content further to 13%, only a 1.1% decline from September levels. In contrast, the average stem water content of B2 calculated as the most significant decrease, with percentage of 3.9%, reflecting a 7.9% drop from its September levels, and a 9.1% variation compared to B1.

5 Discussion

The observed variation in stem water content between the two olive tree branches throughout the study period may be attributed to a range of environmental and physiological factors. While both branches started with similar water content levels in July, the consistent decline in B1 and the more pronounced decline in B2 suggest differential stress responses, potentially due to microclimatic differences, branch orientation, or early indications of disease.

The 2% difference between the branches in September is noteworthy, as it could signify the onset of physiological stress in B2. Such variations in water content may serve as early indicators of compromised water transport within the tree, a characteristic effect observed in olive trees infected by pathogens like *X. fastidiosa*. Previous research has demonstrated that *X. fastidiosa* infection leads to reduced water uptake and transport, resulting in a noticeable decline in stem water content over time.

Furthermore, the dramatic 9% decrease in stem water content in B2 in November suggests a progression of this potential stress or disease. While this sharp drop could result from environmental factors, such as drought stress or differences in soil moisture availability, it aligns with the known symptoms of *X. fastidiosa* infection, which typically manifests as significant water transport dysfunction.

6 Conclusion – Future work

This study demonstrates the successful development and field deployment of a low-cost EC probe system for the early detection of *X. fastidiosa* in olive trees. By continuously monitoring stem water content, this system offers a practical, real-time, and sustainable solution that empowers cultivators to identify the presence of the pathogen before visual symptoms, such as Olive Quick Decline Syndrome, become apparent. The results from the field trial, conducted on an olive tree in Southern Italy, indicate that changes in water conductivity can be reliably associated with the progression of *X. fastidiosa* infections.

Compared to traditional laboratory-based diagnostic methods like PCR, this system provides an affordable and scalable alternative, particularly for regions where resources for constant monitoring may be limited. The integration of solar power and GSM data transmission further enhances the system's utility, enabling continuous monitoring even in remote areas. The system's ability to transmit data to a central server facilitates large-scale monitoring across multiple locations, supporting a coordinated and proactive approach to managing the spread of *X. fastidiosa*.

Future research will aim to improve the sensitivity of the system and extend its application to a wider range of environments and tree species, or even to more diverse applications such as fire spread simulation. Expanding field trials and refining the probe design can lead to broader adoption of this technology, ultimately contributing to the safeguarding of olive cultivation, which is vital both economically and culturally in affected regions. Through early detection and intervention, this system could play a crucial role in mitigating the devastating effects of *X. fastidiosa* on the olive industry.

Acknowledgements

Funded by the European Union for the project REMARKABLE (GA 101086387). Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union or the European Research Executive Agency (REA). Neither the European Union nor the granting authority can be held responsible for them.

References

- [1] M. Saponari, D. Boscia, G. Altamura, G. Loconsole, S. Zicca, G. D’Attoma, M. Morelli, F. Palmisano, A. Saponari, D. Tavano, et al., Isolation and pathogenicity of *Xylella fastidiosa* associated to the olive quick decline syndrome in southern Italy, *Sci. Rep.* 7.1 (2017). doi:10.1038/s41598-017-17957-z.
- [2] Loumou, A., & Giourga, C. (2003). Olive groves: “The life and identity of the Mediterranean”. *Agriculture and Human Values*, 20(1), 87-95. <https://doi.org/10.1023/a:1022444005336>
- [3] Besnard, G., Terral, J.-F., & Cornille, A. (2017). On the origins and domestication of the olive: a review and perspectives. *Annals of Botany*, 121(3), 385–403. <https://doi.org/10.1093/aob/mcx145>
- [4] Kaniewski, D., Van Campo, E., Boiy, T., Terral, J.-F., Khadari, B., & Besnard, G. (2012). Primary domestication and early uses of the emblematic olive tree: palaeobotanical, historical and molecular evidence from the Middle East. *Biological Reviews*, 87(4), 885–899. <https://doi.org/10.1111/j.1469-185x.2012.00229.x>
- [5] Pierce NB. 1892. The California Vine Disease: A Preliminary Report of Investigations. Washington, DC: Gov. Print. Off.
- [6] *Xylella fastidiosa* (XYLEFA) [World distribution] | EPPO Global Database. URL: <https://gd.eppo.int/taxon/XYLEFA/distribution>.
- [7] Saponari, M., Boscia, D., Nigro, F., & Martelli, G.P. (2013). Identification of DNA sequences related to *Xylella fastidiosa* in oleander, almond and olive trees exhibiting leaf scorch symptoms in Apulia (southern Italy). *Journal of Plant Pathology*, 95, 668.
- [8] A. M. Matheny, S. R. Garrity, G. Bohrer, The Calibration and Use of Capacitance Sensors to Monitor Stem Water Content in Trees, *J. Vis. Exp.* No. 130 (2017). doi:10.3791/57062.
- [9] T. Saito, H. Yasuda, M. Sakurai, K. Acharya, S. Sueki, K. Inosako, K. Yoda, H. Fujimaki, M. A. M. Abd Elbasit, A. M. Eldoma, et al., Monitoring of Stem Water Content of Native and Invasive Trees in Arid Environments Using GS3 Soil Moisture Sensors, *Vadose Zone J.* 15.3 (2016) vzj2015.04.0061. doi:10.2136/vzj2015.04.0061.
- [10] X. Cheng, X. Yan, D. A. Grantz, Y. Xiang, R. F. de Oliveira, L. Huang, Z. Wang, T. Du, Q. Cheng, In-situ and non-invasive measurement of stem water content of trees using an innovative interdigitated-electrodes dielectric sensor less susceptible to stem diameter variation, *Agric. For. Meteorol.* 307 (2021) 108473. doi: 10.1016/j.agrformet.2021.108473.
- [11] A. Castrignanò, A. Belmonte, I. Antelmi, R. Quarto, F. Quarto, S. Shaddad, V. Sion, M. R. Muolo, N. A. Ranieri, G. Gadaleta, et al., Semi-Automatic Method for Early Detection of *Xylella fastidiosa* in Olive Trees Using UAV Multispectral Imagery and Geostatistical-Discriminant Analysis, *Remote Sens.* 13.1 (2020) 14. doi:10.3390/rs13010014.
- [12] A. Di Nisio, F. Adamo, G. Acciani, F. Attivissimo, Fast Detection of Olive Trees Affected by *Xylella Fastidiosa* from UAVs Using Multispectral Imaging, *Sensors* 20.17 (2020) 4915. doi:10.3390/s20174915.
- [13] M. Morelli, J. M. García-Madero, Á. Jos, P. Saldarelli, C. Dongiovanni, M. Kovacova, M. Saponari, A. Baños Arjona, E. Hackl, S. Webb, et al., *Xylella fastidiosa* in Olive: A Review of Control Attempts and Current Management, *Microorganisms* 9.8 (2021) 1771. doi:10.3390/microorganisms9081771.
- [14] Dixon, M. A., Thompson, R. G., & Fensom, D. S. (1978). Electrical resistance measurements of water potential in avocado and white spruce. *Canadian Journal of Forest Research*, 8(1), 73–80. <https://doi.org/10.1139/x78-013>
- [15] Libretexts. (2013, October 2). 6.8A: *Electrical Conductivity and Resistivity*. Chemistry LibreTexts. <https://chem.libretexts.org>